




PBT-010




Materials(Button): PVC, Faceplate: Stainless steel
Momentary DPDT
Max. Rating : 5A/250 VAC, 6A/24VDC
Contact resistance: 50 mΩ Max.(initial)
Operating life(Mechanical) : Over 100,000 times
Operating travel: 3.2 mm



Free Position



Operation Position

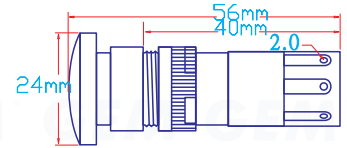


1,2=N/C
3,4=N/O
a,b (Null)

(S-SI-PBT)




PBT-020-4



Stainless steel faceplate



Free Position



Operation Position

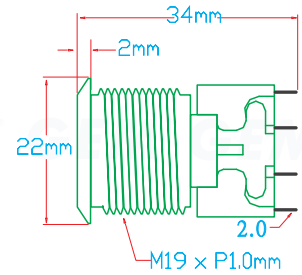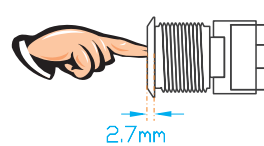


(S-SI-PBT-4-GEM)



PBT-025-4

Aluminum alloy faceplate

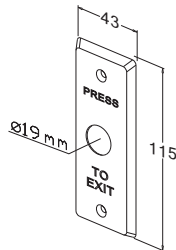


Switch Specifications

Material: Stainless steel
Momentary DPDT
Max. Ratings : 5A/125/250 VAC
Contact resistance: 50 mΩ Max.(initial)
Operating life(Mechanical) : Over 100,000 times
Operating travel: 2.7 mm




PBT-026-4

Aluminum alloy faceplate








PBT-020-2
Stainless steel faceplate

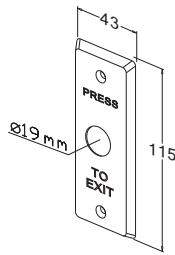

Free Position



Operation Position

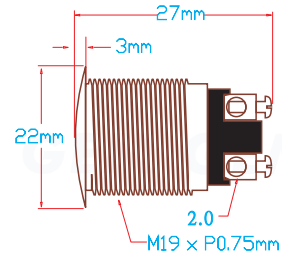


(P-SI-PBT-2)

Switch Specifications


Materials (Button): Copper alloys
 Momentary normal open (N.O.)
 Max. Rating : 3A/125VAC, 6A/24VDC
 Contact resistance: 50 mΩ Max. (initial)
 Operating life(Mechanical) : Over 100,000 times
 Operating travel: 2.0 mm




PBT-200-2
Stainless steel faceplate




PBT-025J
Aluminum alloy faceplate

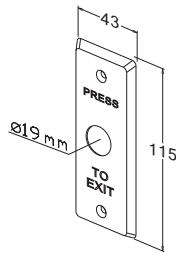

Free Position



Operation Position

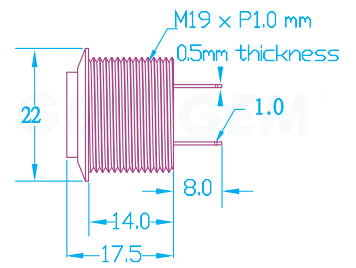


(MSW-1902-EXIT)

Switch Specifications


Material: Stainless steel
 Max. Ratings : 5mA@12Vdc
 Momentary Single pole single throw (N.O.)
 Contact resistance: 1kΩ Max. (initial)
 Operating life(5mA/5VDC) : Over 100,000 times
 Operating travel: 1.75mm



PBT-026J
Aluminum alloy faceplate



PBT-200J
Stainless steel faceplate



Optional Accessory



SMB-040

The **PBT-010**, **PBT-020**, **PBT-025** can be surface mounting with SMB-040 housing.

GIANNI INDUSTRIES, INC.